


- Energy efficient T8 & T5 options
- Fully integral emergency
- Dimmable options
- Comprehensive range of attachments

Crompack

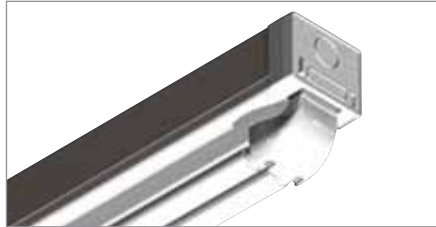

Low Power Factor - CLP fluorescent batten c/w lamps

Cat no.	Description
CLPB21	1 x 18W
CLPB22	2 x 18W
CLPB31	1 x 30W
CLPB32	2 x 30W
CLPB41	1 x 36W
CLPB42	2 x 36W
CLPB51	1 x 58W
CLPB52	2 x 58W
CLPB61	1 x 70W
CLPB62	2 x 70W

High Frequency T5

Cat no.	Description
CP135Z	1.5m 1 x 35W
CP235Z	1.5m 2 x 35W
CP149Z	1.5m 1 x 49W
CP249Z	1.5m 2 x 49W

Emergency version

Cat no.	Description
EBCP135Z	1.5m 1 x 35W
EBCP235Z	1.5m 2 x 35W
EBCP149Z	1.5m 1 x 49W
EBCP249Z	1.5m 2 x 49W

Prismatic Diffusers

Cat no.	Description	NTP	1-9	10+
Prismatic controllers (single)				
CPC41	1.2m	21.78	7.62	6.53
CPC51	1.5m	26.29	9.20	7.89
CPC61	1.8m	30.76	10.77	9.23
CPC81	2.4m	42.36	14.83	12.71
Prismatic controllers (twin)				
CPC42	1.2m	30.03	10.51	9.01
CPC52	1.5m	34.35	12.02	10.31
CPC62	1.8m	40.53	14.19	12.16
CPC82	2.4m	54.41	19.04	16.32

High Power Factor switch start batten c/w lamps

Cat no.	Description
CP41S	1 x 36W
CP42S	2 x 36W
CP51S	1 x 58W
CP52S	2 x 58W
CP61S	1 x 70W
CP62S	2 x 70W
CP81S	1 x 100W
CP82S	2 x 100W

Emergency version

Cat no.	Description
EBCP51S	1 x 58W
EBCP52S	2 x 58W
EBCP61S	1 x 70W
EBCP62S	2 x 70W



Reflectors

Cat no.	Description
CR4	1.2m
CR5	1.5m
CR6	1.8m
CR8	2.4m

Opal Diffusers

Cat no.	Description
Opal diffusers (single)	
CPD41	1.2m
CPD51	1.5m
CPD61	1.8m
CPD81	2.4m
Opal diffusers (twin)	
CPD42	1.2m
CPD52	1.5m
CPD62	1.8m
CPD82	2.4m


High Frequency T8 fluorescent batten c/w lamps

Cat no.	Description
CP41Z	1 x 36W
CP42Z	2 x 36W
CP51Z	1 x 58W
CP52Z	2 x 58W
CP61Z	1 x 70W
CP62Z	2 x 70W

Emergency version

Cat no.	Description
EBCP51Z	1 x 58W
EBCP52Z	2 x 58W
EBCP61Z	1 x 70W
EBCP62Z	2 x 70W


Wire guards and Rack reflectors available on request

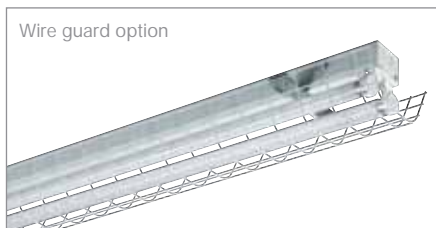

Recessed Modulay

- Strong, fully enclosed body, reducing light spill into void
- One luminaire fits 15mm & 24mm exposed "T" ceiling systems
- Choice of 65° - 1000 cd/m² louvre and TPb or TPa (Fire Retardant) prismatic panels
- Part L compliant when using high frequency control gear & triphosphor lamps
- Fully integral emergency versions
- Supplied less lamp

IP20

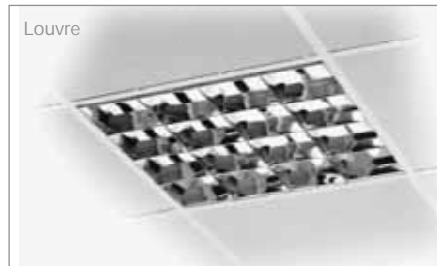

Modular recessed luminaires (switch start)

Cat no.	Description
CLPM24SS	600 x 600mm for 4 x 18W
CLPMEB24SS	(Emergency)
CLPM44SS	600 x 1200mm for 4 x 36W
CLPMEB44SS	(Emergency)

Category 2 65° 200cd/m² louvres

(Suits 15 & 24mm T due to accessory located in housing)

Cat no.	Description
CLPMRC224V	600 x 600mm for 4 x 18W
CLPMRC244V	600 x 1200mm for 4 x 36W


Modular recessed packs (switch start)

(c/w cat 2 louvre, excl lamp)

Cat no.	Description
CLPM24SSPACK	600x600mm for 4x18W
CLPMEB24SSPACK	(Emergency)
CLPM44SSPACK	600x1200mm for 4x36W
CLPMEB44SSPACK	(Emergency)

Modular recessed luminaires (high frequency)

Cat no.	Description
CLPM24HF	600 x 600mm for 4 x 18W
CLPMEB24HF	(Emergency)
CLPM44HF	600 x 1200mm for 4 x 36W
CLPMEB44HF	(Emergency)

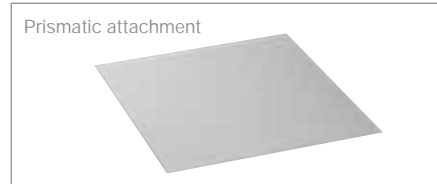

Prismatic panels (TPb rated, for 24mm)

Cat no.	Description
CLPM24P	600 x 600mm
CLPM44P	600 x 1200mm

Modular recessed packs (high frequency)

(c/w cat 2 louvre, excl lamp)

Cat no.	Description
CLPM24HFPACK	600x600mm for 4x18W
CLPMEB24HFPACK	(Emergency)
CLPM44HFPACK	600x1200mm for 4x36W
CLPMEB44HFPACK	(Emergency)

Modular Recessed Direct/Indirect (High frequency)

Cat no.	Description
MDI414Z	4 x 14W
MDI240Z	2 x 40W
MDI155Z	1 x 55W
MDI255Z	2 x 55W

Emergency version

Cat no.	Description
EBMDI414Z	4 x 14W
EBMDI240Z	2 x 40W
EBMDI155Z	1 x 55W
EBMDI255Z	2 x 55W

- Efficient soft-lit lighting effect
- Suitable 15mm & 24mm exposed T
- Part L compliant
- C/w tubes

IP20 Modulay DI



Chevin Plus

- Positive shoot-bolt louvre retention
- 65°-1000cd/u2 louvre
- T8 & T5 options available
- Part L compliant when using HF gear and Triphosphor lamp
- Integral emergency

Surface luminaire c/w louvre (switch start) (c/w tubes)

Cat no.	Description
CVX252S	2 x 58W
EBCVX252S	(Emergency)
CVX262S	2 x 70W
EBCVX262S	(Emergency)

Surface luminaire c/w louvre (high frequency) (c/w tubes)

Cat no.	Description
CVX252Z	2 x 58W
EBCVX252Z	(Emergency)
CVX262Z	2 x 70W
EBCVX262Z	(Emergency)



Wavelite



- T8 & T5 (on request) options available
- F marked and IP40 rated
- Integral emergency
- Supplied less lamp



Switch Start

Cat no.	Description
WLTP258SX	2 x 58W pris
WLTP270SX	2 x 70W pris
Emergency version	
Cat no.	Description
EBWLTP258SX	2 x 58W pris
EBWLTP270SX	2 x 70W pris

High Frequency

Cat no.	Description
WLTP258ZX	2 x 58W pris
WLTP270ZX	2 x 70W pris
Emergency version	
Cat no.	Description
EBWLTP258ZX	2 x 58W pris
EBWLTP270ZX	2 x 70W pris

Bollard



- Robust aluminium construction
- 70W SON and MBI, 42W CFL
- 42W CFL Integral emergency
- Supplied with lamp

Cat no.	Description
BOLDR70S	70W SON Dome/Reflector
BOLDR70MH	70W MBI Dome/Reflector
BOLDR42Z	42W CFL Dome/Reflector
EBBOLDR42Z	42W CFL Emergency Dome/Reflector
BOLDL70S	70W SON Dome/Louvre
BOLDL70MH	70W MBI Dome/Louvre
BOLDL42Z	42W CFL Dome/Louvre
EBBOLDL42Z	42W CFL Emergency Dome/Louvre
BOLFR70S	70W SON Flat/Reflector
BOLFR70MH	70W MBI Flat/Reflector
BOLFR42Z	42W CFL Flat/Reflector
EBBOLFR42Z	42W CFL Emergency Flat/Reflector
BOLFL70S	70W SON Flat/Louvre
BOLFL70MH	70W MBI Flat/Louvre
BOLFL42Z	42W CFL Flat/Louvre
EBBOLFL42Z	42W CFL Emergency Flat/Louvre
BOLRMK	Root Mounting Kit

- IP65, dust tight and water jet proof
- Vandal resistant polycarbonate body & diffuser
- T8 & T5 lamp options
- Integral emergency
- Supplied less lamp

IP65 **Tufflite**



Switch Start

Cat no	Description
TFW136S	1.2m 1 x 36W
TFW158S	1.5m 1 x 58W
TFW170S	1.8m 1 x 70W
TFW236S	1.2m 2 x 36W
TFW258S	1.5m 2 x 58W
TFW270S	1.8m 2 x 70W
Emergency version	
Cat no	Description
EBTFW136S	1.2m 1 x 36W
EBTFW158S	1.5m 1 x 58W
EBTFW236S	1.2m 2 x 36W
EBTFW258S	1.5m 2 x 58W
EBTFW170S	1.8m 1 x 70W
EBTFW270S	1.8m 2 x 70W

High Frequency T8

Cat no	Description
TFW136Z	1.2m 1 x 36W
TFW158Z	1.5m 1 x 58W
TFW170Z	1.8m 1 x 70W
TFW236Z	1.2m 2 x 36W
TFW258Z	1.5m 2 x 58W
TFW270Z	1.8m 2 x 70W
Emergency version	
Cat no	Description
EBTFW136Z	1.2m 1 x 36W
EBTFW158Z	1.5m 1 x 58W
EBTFW170Z	1.8m 1 x 70W
EBTFW236Z	1.2m 2 x 36W
EBTFW258Z	1.5m 2 x 58W
EBTFW270Z	1.8m 2 x 70W

High Frequency T5

Cat no	Description
TFW135Z	1.5m 1 x 35W
TFW235Z	1.5m 2 x 35W
TFW149Z	1.8m 1 x 49W
TFW249Z	1.8m 2 x 49W
Emergency version	
Cat no	Description
EBTFW135Z	1.5m 1 x 35W
EBTFW235Z	1.5m 2 x 35W
EBTFW149Z	1.8m 1 x 49W
EBTFW249Z	1.8m 2 x 49W

other T5 sizes available

Cat no	Description
GLR70S	70W SON
GLR70SPC	70W SON Photo
GLR70MH	70W MBI
GLR70MHPC	70W MBI Photo
GLR142Z	42W CFL
GLR142ZPC	42W CFL Photo
Emergency version	
Cat no	Description
EBGLR142Z	42W CFL Em
EBGLR142ZPC	42W CFL Em Photo

- Robust Die Cast aluminium base
- Polycarbonate diffuser
- Supplied c/w lamp
- 70W SON and MBI, 42W CFL
- 42W CFL Integral emergency
- Dawn to dusk photocell control

IP65 **Gladiator**



High Frequency

Cat no	Description
EKS218Z	2 x 18W
EKS226Z	2 x 26W
EREKS218Z	2 x 18W Em
EREKS226Z	2 x 26W Em
EKSIP44GLASS	IP44 Glass
EKSHGLASS	Haloglass

- Decorative low profile downlight
- Integral Emergency
- Supplied with lamps
- IP44 and decorative glass attachment

IP44 **IP20** **Ekostar**



High Frequency

Cat no	Description
BJ16Z	1 X 16W 2D
BJ28Z	1 X 28W 2D
BJ38Z	1 X 38W 2D
Emergency version	
Cat no.	Description
EBBJ28Z	1 X 28W 2D

- Decorative low profile
- IP54 wall or ceiling mount
- Supplied with premium brand lamp & gear
- Range of chrome, brass, satin silver bezels

IP54 **Bijou**

